



October 2005

FDD6637

35V P-Channel PowerTrench® MOSFET

General Description



This P-Channel MOSFET has been produced using Fairchild Semiconductor's proprietary PowerTrench technology to deliver low $R_{DS(on)}$ and optimized $Bvdss$ capability to offer superior performance benefit in the applications.

Applications

- Inverter
- Power Supplies

Features

- -55 A, -35 V $R_{DS(ON)} = 11.6 \text{ m}\Omega$ @ $V_{GS} = -10 \text{ V}$
 $R_{DS(ON)} = 18 \text{ m}\Omega$ @ $V_{GS} = -4.5 \text{ V}$
- High performance trench technology for extremely low $R_{DS(ON)}$
- RoHS Compliant



Absolute Maximum Ratings

 $T_A=25^\circ\text{C}$ unless otherwise noted

Symbol	Parameter	Ratings	Units
V_{DSS}	Drain-Source Voltage	-35	V
$V_{DS(\text{Avalanche})}$	Drain-Source Avalanche Voltage (maximum)	(Note 4)	V
V_{GSS}	Gate-Source Voltage	± 25	V
I_D	Continuous Drain Current @ $T_C=25^\circ\text{C}$	(Note 3)	A
	@ $T_A=25^\circ\text{C}$	(Note 1a)	
	Pulsed	(Note 1a)	
P_D	Power Dissipation @ $T_C=25^\circ\text{C}$	(Note 3)	W
	@ $T_A=25^\circ\text{C}$	(Note 1a)	
	@ $T_A=25^\circ\text{C}$	(Note 1b)	
T_J, T_{STG}	Operating and Storage Junction Temperature Range	-55 to +150	°C

Thermal Characteristics

$R_{\theta JC}$	Thermal Resistance, Junction-to-Case	(Note 1)	2.2	°C/W
$R_{\theta JA}$	Thermal Resistance, Junction-to-Ambient	(Note 1a)	40	
$R_{\theta JA}$	Thermal Resistance, Junction-to-Ambient	(Note 1b)	96	

Package Marking and Ordering Information

Device Marking	Device	Package	Reel Size	Tape width	Quantity
FDD6637	FDD6637	D-PAK (TO-252)	13"	12mm	2500 units

Electrical Characteristics							
<small>T_A = 25°C unless otherwise noted</small>							
Symbol	Parameter	Test Conditions		Min	Typ	Max	Units
Drain-Source Avalanche Ratings							
E _{AS}	Drain-Source Avalanche Energy (Single Pulse)	V _{DD} = -35 V, I _D = -11 A, L = 1mH		61			mJ
I _{AS}	Drain-Source Avalanche Current			-14			A
Off Characteristics (Note 2)							
BV _{DSS}	Drain-Source Breakdown Voltage	V _{GS} = 0 V, I _D = -250 μA	-35				V
I _{DSS}	Zero Gate Voltage Drain Current	V _{DS} = -28 V, V _{GS} = 0 V			-1		μA
I _{GSS}	Gate-Body Leakage	V _{GS} = ±25 V, V _{DS} = 0 V			±100		nA
On Characteristics (Note 2)							
V _{GS(th)}	Gate Threshold Voltage	V _{DS} = V _{GS} , I _D = -250 μA	-1	-1.6	-3		V
R _{DS(on)}	Static Drain-Source On-Resistance	V _{GS} = -10 V, I _D = -14 A V _{GS} = -4.5 V, I _D = -11 A V _{GS} = -10 V, I _D = -14 A, T _J =125°C		9.7 14.4 14.7	11.6 18 19		mΩ
g _{FS}	Forward Transconductance	V _{DS} = -5 V, I _D = -14 A		35			S
Dynamic Characteristics							
C _{iss}	Input Capacitance	V _{DS} = -20 V, V _{GS} = 0 V, f = 1.0 MHz		2370			pF
C _{oss}	Output Capacitance			470			pF
C _{rss}	Reverse Transfer Capacitance			250			pF
R _G	Gate Resistance	f = 1.0 MHz		3.6			Ω
Switching Characteristics (Note 2)							
t _{d(on)}	Turn-On Delay Time	V _{DD} = -20 V, I _D = -1 A, V _{GS} = -10 V, R _{GEN} = 6 Ω		18	32		ns
t _r	Turn-On Rise Time			10	20		ns
t _{d(off)}	Turn-Off Delay Time			62	100		ns
t _f	Turn-Off Fall Time			36	58		ns
Q _g	Total Gate Charge, V _{GS} = -10V	V _{DS} = -20 V, I _D = -14 A		45	63		nC
Q _g	Total Gate Charge, V _{GS} = -5V			25	35		nC
Q _{gs}	Gate-Source Charge			7			nC
Q _{gd}	Gate-Drain Charge			10			nC


Electrical Characteristics

$T_A = 25^\circ\text{C}$ unless otherwise noted

Symbol	Parameter	Test Conditions	Min	Typ	Max	Units
Drain–Source Diode Characteristics						
V_{SD}	Drain–Source Diode Forward Voltage	$V_{GS} = 0 \text{ V}$, $I_S = -14 \text{ A}$ (Note 2)		-0.8	-1.2	V
trr	Diode Reverse Recovery Time	$\text{IF} = -14 \text{ A}$, $d\text{IF}/dt = 100 \text{ A}/\mu\text{s}$		28		ns
Qrr	Diode Reverse Recovery Charge			15		nC

Notes:

- R_{0JA} is the sum of the junction-to-case and case-to-ambient thermal resistance where the case thermal reference is defined as the solder mounting surface of the drain pins. R_{0JC} is guaranteed by design while R_{0CA} is determined by the user's board design.



Scale 1 : 1 on letter size paper

2. Pulse Test: Pulse Width < 300μs, Duty Cycle < 2.0%

3. Maximum current is calculated as:
$$\sqrt{\frac{P_D}{R_{DS(ON)}}}$$

where P_D is maximum power dissipation at $T_C = 25^\circ\text{C}$ and $R_{DS(ON)}$ is at $T_{J(\text{max})}$ and $V_{GS} = 10\text{V}$. Package current limitation is 21A

4. BV(avalanche) Single-Pulse rating is guaranteed if device is operated within the UIS SOA boundary of the device.



a) $R_{0JA} = 40^\circ\text{C}/\text{W}$ when mounted on a 1in² pad of 2 oz copper



b) $R_{0JA} = 96^\circ\text{C}/\text{W}$ when mounted on a minimum pad.

Typical Characteristics

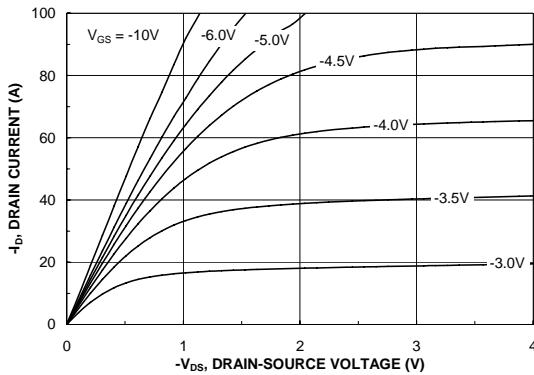


Figure 1. On-Region Characteristics

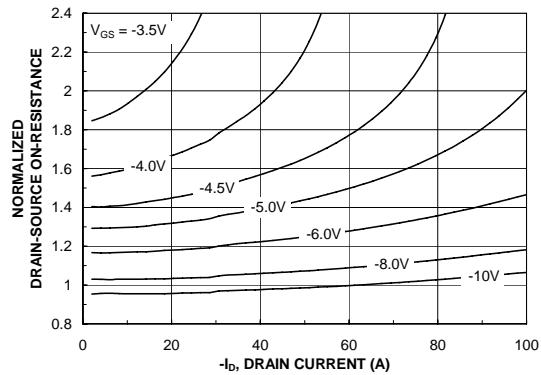


Figure 2. On-Resistance Variation with Drain Current and Gate Voltage

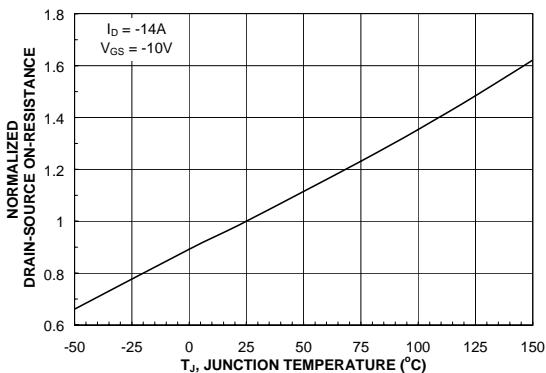


Figure 3. On-Resistance Variation with Temperature

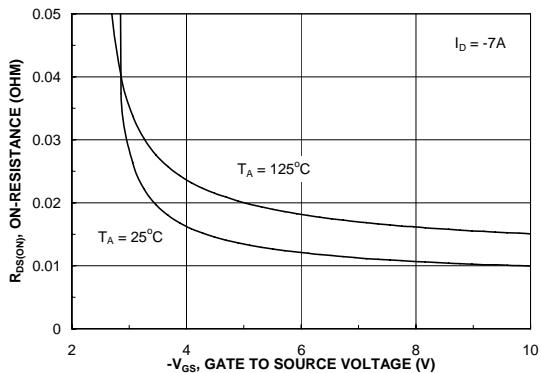


Figure 4. On-Resistance Variation with Gate-to-Source Voltage

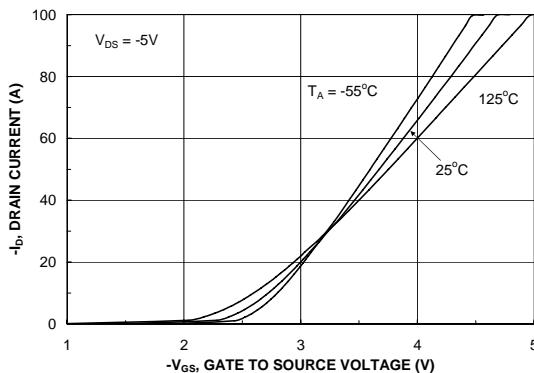


Figure 5. Transfer Characteristics

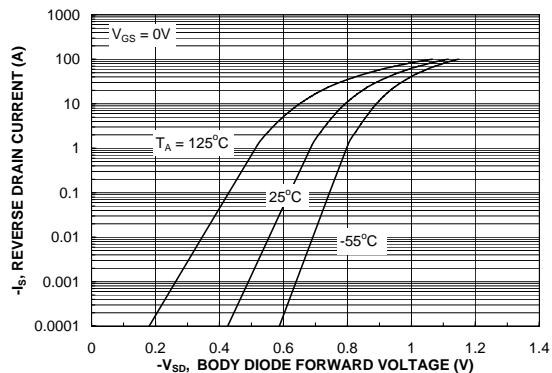


Figure 6. Body Diode Forward Voltage Variation with Source Current and Temperature

Typical Characteristics

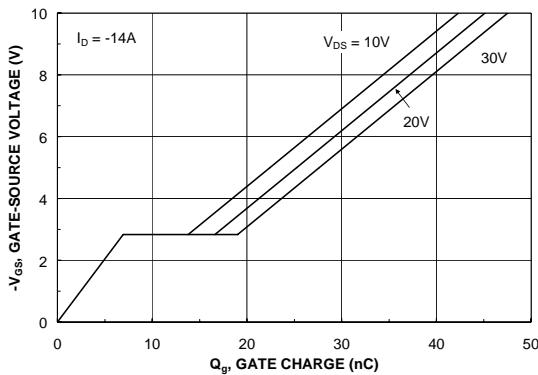


Figure 7. Gate Charge Characteristics

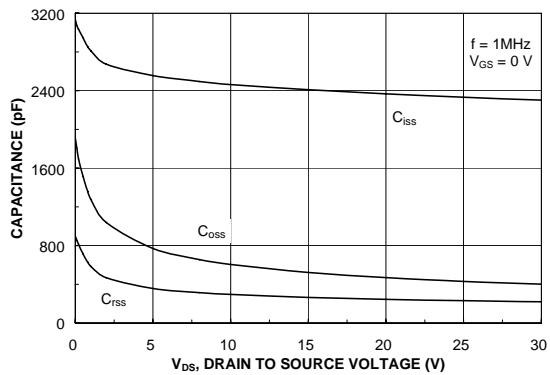


Figure 8. Capacitance Characteristics

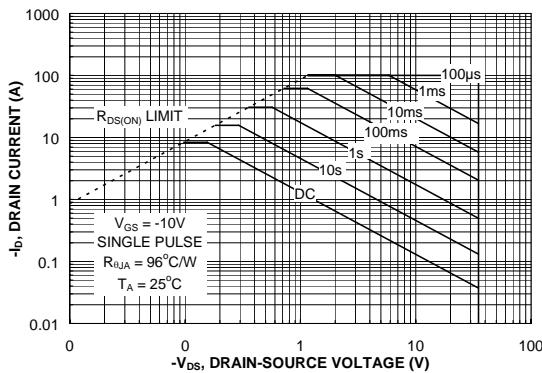


Figure 9. Maximum Safe Operating Area

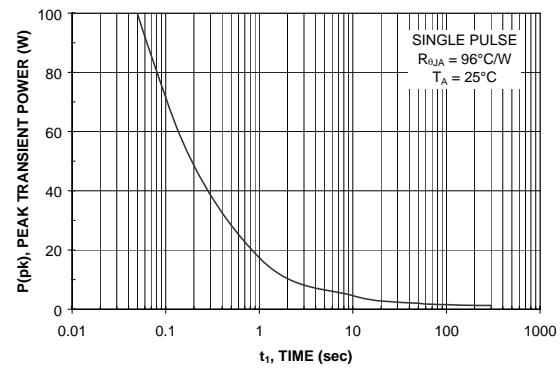


Figure 10. Single Pulse Maximum Power Dissipation

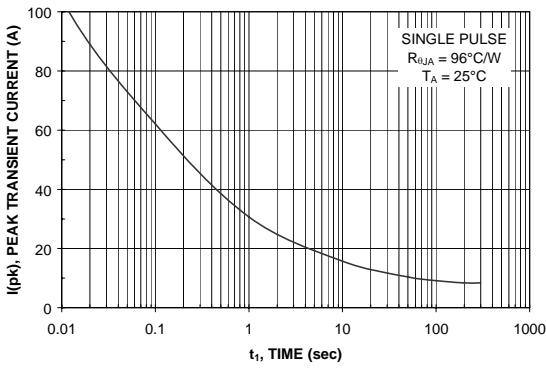


Figure 11. Single Pulse Maximum Peak Current

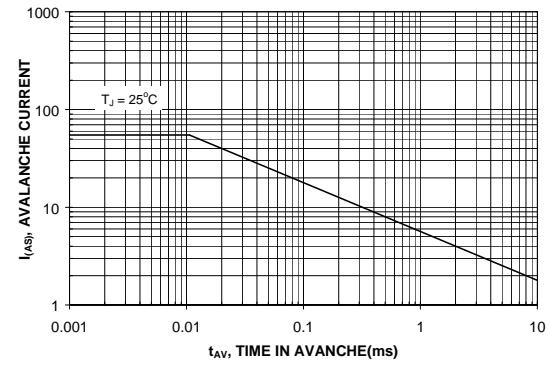


Figure 12. Unclamped Inductive Switching Capability

Typical Characteristics

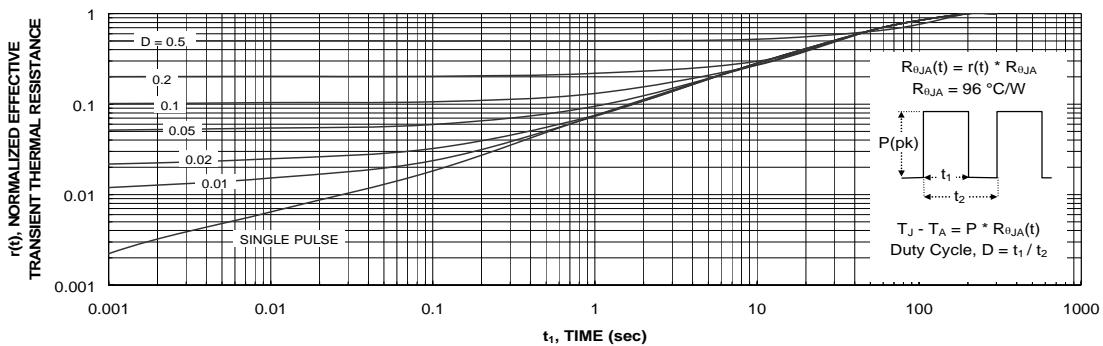


Figure 13. Transient Thermal Response Curve

Thermal characterization performed using the conditions described in Note 1b.
Transient thermal response will change depending on the circuit board design.

TRADEMARKS

The following are registered and unregistered trademarks Fairchild Semiconductor owns or is authorized to use and is not intended to be an exhaustive list of all such trademarks.

ACE™	FAST®	ISOPLANAR™	PowerSaver™	SuperSOT™-6
ActiveArray™	FASTr™	LittleFET™	PowerTrench®	SuperSOT™-8
Bottomless™	FPS™	MICROCOUPLER™	QFET®	SyncFET™
Build it Now™	FRFET™	MicroFET™	QS™	TinyLogic®
CoolFET™	GlobalOptoisolator™	MicroPak™	QT Optoelectronics™	TINYOPTO™
CROSSVOLT™	GTO™	MICROWIRE™	Quiet Series™	TruTranslation™
DOME™	HiSeC™	MSX™	RapidConfigure™	UHC™
EcoSPARK™	I²C™	MSXPro™	RapidConnect™	UltraFET®
E²CMOS™	i-Lo™	OCX™	µSerDes™	UniFET™
EnSigna™	ImpliedDisconnect™	OCXPro™	ScalarPump™	VCX™
FACT™	IntelliMAX™	OPTOLOGIC®	SILENT SWITCHER®	Wire™
FACT Quiet Series™		OPTOPLANAR™	SMART START™	
Across the board. Around the world.™		PACMAN™	SPM™	
The Power Franchise®		POP™	Stealth™	
Programmable Active Droop™		Power247™	SuperFET™	
		PowerEdge™	SuperSOT™-3	

DISCLAIMER

FAIRCHILD SEMICONDUCTOR RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE TO ANY PRODUCTS HEREIN TO IMPROVE RELIABILITY, FUNCTION OR DESIGN. FAIRCHILD DOES NOT ASSUME ANY LIABILITY ARISING OUT OF THE APPLICATION OR USE OF ANY PRODUCT OR CIRCUIT DESCRIBED HEREIN; NEITHER DOES IT CONVEY ANY LICENSE UNDER ITS PATENT RIGHTS, NOR THE RIGHTS OF OTHERS.

LIFE SUPPORT POLICY

FAIRCHILD'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF FAIRCHILD SEMICONDUCTOR CORPORATION. As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, or (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in significant injury to the user.
2. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

PRODUCT STATUS DEFINITIONS

Definition of Terms

Datasheet Identification	Product Status	Definition
Advance Information	Formative or In Design	This datasheet contains the design specifications for product development. Specifications may change in any manner without notice.
Preliminary	First Production	This datasheet contains preliminary data, and supplementary data will be published at a later date. Fairchild Semiconductor reserves the right to make changes at any time without notice in order to improve design.
No Identification Needed	Full Production	This datasheet contains final specifications. Fairchild Semiconductor reserves the right to make changes at any time without notice in order to improve design.
Obsolete	Not In Production	This datasheet contains specifications on a product that has been discontinued by Fairchild semiconductor. The datasheet is printed for reference information only.

This datasheet has been downloaded from:

www.EEworld.com.cn

Free Download

Daily Updated Database

100% Free Datasheet Search Site

100% Free IC Replacement Search Site

Convenient Electronic Dictionary

Fast Search System

www.EEworld.com.cn